

## INTRODUCTION

The power generation system, providing optimum performance, and reliability, for stationary standby, prime power, and continuous duty applications. All generator sets are factory build, and production tested.

### Power (kVA)

3 Phase, 50 Hz, PF 0.8

VOLTAGE	STANDBY RATING (ESP)		PRIME RATING (PRP)		Standby Amper
	kW	kVA	kW	kVA	
400/231	105,00	132	96.0	120	190.7

**STANDBY RATING (ESP)** Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. ESP is in accordance with ISO 8528. Overload is not allowed.

**PRIME RATING (PRP)** Applicable for supplying power to varying electrical load for unlimited hours. PRP is in accordance with ISO 8528. 10 % overload capability is available for a period of 1 hour within 12-hour period of operation, in accordance with ISO 3046.

## General Characteristics

Model Name	DPX-15549
Frequency (Hz)	50
Fuel Type	Diesel
Engine Made and Model	DOOSAN D1146T
Alternator Made and Model	Mecc Alte ECP34-1L/4
Control Panel Model	7320
Canopy	AK 50 TRP

## ENGINE SPECIFICATIONS

Engine	DOOSAN
Engine Model	D1146T
Number of Cylinder (L)	6 cylinders - in line
Bore (mm.)	111
Stroke (mm.)	139
Displacement (lt.)	8.071
Aspiration	Turbo Charged and Intercooled(Air to Air)
Compression Ratio	16.4:1
RPM (d/dk)	1500

Oil Capacity (Total With Filter) (lt)	15.5
STANDBY POWER	105/132
Prime Power	96/120
Block Heater QTY	1
Block Heater Power (Watt)	15000
Fuel Type	Diesel
Injection Type and System	Direct
Type of Fuel Pump	Zexel P inline
Governor System	Electronic
Operating Voltage (Vdc)	24 Vdc
Battery and Capacity (Qty/Ah)	2x85
Charge Alternator (A)	45
Cooling Method	Water Cooled
Cooling Fan Air Flow (m3/min)	250
Coolant Capacity (engine only / with radiator) (lt)	14/46
Air Filter	Dry Type
Fuel Cons. Prime With %100 Load (lt/hr)	25.9
Fuel Cons. Prime With %75 Load (lt/hr)	19.5
Fuel Cons. Prime With %50 Load (lt/hr)	13.6

## ALTERNATOR CHARACTERISTICS


Manufacturer	Mecc Alte
Alternator Made and Model	Mecc Alte ECP34-1L/4
Frequency (Hz)	50
Power (kVA)	200
VOLTAGE (V)	400
Phase	3
A.V.R.	SX440
Voltage Regulation	(+/-)1%
Insulation System	H
Protection	IP22
Rated Power Factor	0.8
WEIGHT WOUND ROTOR (Kg)	227.53
COOLING AIR (m <sup>3</sup> /min)	30.84

## Open Gen.Set Dimensions (mm)

LENGHT	2690
WIDTH	1150
HEIGHT	1620
DRY WEIGHT (kg.)	1800
TANK CAPACITY (lt.)	380

## Gen.Set Canopy Dimensions (mm)

LENGTH	3400
WIDTH	1220
HEIGHT	1940
DRY WEIGHT (kg.)	2175
TANK CAPACITY (lt.)	380

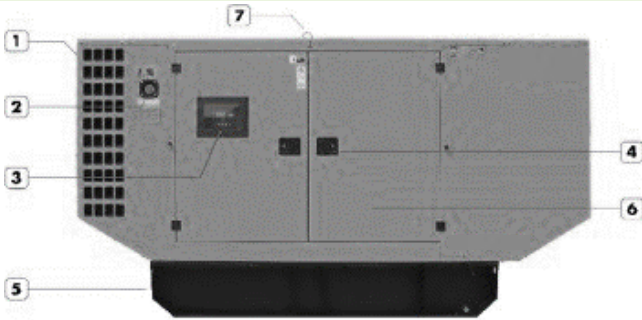


1. Steel structures
2. Emergency stop push button
3. Control panel is right side of the set.
4. Corrosion. Resistant locks and hinges
5. Sump drains valves
6. Sound proof foam material
7. Lifting Points

## INTRODUCTION

Sound-attenuated and Weather-protective Enclosures Sound-attenuated and weather protective enclosures for our generating sets, meet even the sound requirements and provide optimum protection from inclement weather and development by our specialist acoustic engineers. Our modular designed sound insulated canopies provide ease of access for servicing and general maintenance and interchangeable components permitting on-site repair. Enclosures are designed to optimize genset cooling performance, providing you with confidence that genset ratings and ambient capability.

## Control Panel

Control Module	DSE
Control Module Model	7320
Communication Ports	MODBUS

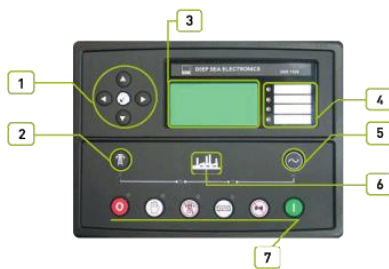

1. Menu navigation buttons
2. Close mains button
3. Main Status and instrumentation display
4. Alarm LED's
5. Close generator button
6. Status LED's
7. Operation selecting buttons

## Devices

DSE, model 7320 Auto Mains Failure control module Static battery charger Emergency stop push button and fuses for control circuits

## CONSTRUCTION and FINISH

Components installed in sheet steel enclosure.

Phosphate chemical, pre-coating of steel provides corrosion resistant surface

Polyester composite powder topcoat forms high gloss and extremely durable finish

Lockable hinged panel door provides for easy component access

## INSTALLATION

Control panel is mounted generating set base frame on robust steel stand or power module. Located at side of generating set with properly panel visibility.

## GENERATING SET CONTROL UNIT

The DSE 7320 control module is a standard addition to our generator sets from 220 kVA upwards and it has been designed to start and stop diesel and gas generating sets that include electronic and non-electronic engines.

The DSE 7320 includes the additional capability of being able to monitor a mains (utility) supply and is therefore suitable for controlling a standby generating set in conjunction with an automatic transfer switch.

The DSE7320 also indicates operational status and fault conditions, automatically shutting down the generating set and indicating faults by means of its LCD display on the front panel.

## STANDARD SPECIFICATIONS

Microprocessor controlled

- 132 x 64 pixel LCD display makes information easy to read
- Front panel programming and also via PC software
- Soft touch membrane keypad and five key menu navigation
- Remote communications via RS232, RS485 and Ethernet and SMS messaging
- Event logging (50) showing date and time
- Multiple date and time engine exercise mode and maintenance scheduler
- Engine block heater control.
- Controls; stop, Manuel, auto, test, start, mute lamb test/transfer to generator, transfer to mains, menu navigation.

## Instruments

### ENGINE

Engine speed

Oil pressure

Coolant temperature

Run time Battery volts

Engine maintenance due

### GENERATOR

Voltage (L-L, L-N)

Current (L1-L2-L3)

Frequency

Earth current

kW

Pf

kVAr

kWh, kVAh, kVArh

Phase sequence

### MAINS

Voltage (L-L, L-N)

Frequency

### WARNING

Charge failure

Battery under voltage  
Fail to stop  
Low fuel level (opt.)  
kW over load  
Negative phase sequence  
Loss of speed signal  
**PRE-ALARMS**  
Low oil pressure  
High engine temperature  
Low engine temperature  
Over /Under speed  
Under/over generator frequency  
Under/over generator voltage  
ECU warning  
**SHUT DOWNS**  
Fail to start  
Emergency stop  
Low oil pressure  
High engine temperature  
Low coolant level  
Over /Under speed  
Under/over generator frequency  
Under/over generator voltage  
Oil pressure sensor open  
Phase rotation  
**ELECTRICAL TRIP**  
Earth fault  
kW over load  
Generator over current  
Negative phase sequence

#### **Options**

High oil temperature shut down  
Low fuel level shut down  
Low fuel level alarm  
High fuel level alarm  
**EXPANSION MODULES**  
Additional LED module (2548)  
Expansion relay module (2157)  
Expansion input module (2130)

#### **Standards**

Electrical Safety / EMC compatibility

BS EN 60950 Electrical business equipment

BS EN 61000-6-2 EMC immunity standard

BS EN 61000-6-4 EMC emission standard

## STATIC BATTERY CHARGER

Battery charger is manufactured with switching-mode and SMD technology and it has high efficiency.

Battery charger models' output V-I characteristic is very close to square

2405 has fully output short circuit protection and it can be used as a current source.

2405 charger has high efficiency, long life, low failure rate, light weight and low heat radiated in accordance with linear alternatives.

The charger is fitted with a protection diode across the output.

Charge fail output is available.

Connect charge fail relay coil between positive output and CF output.

Input: 196-264V.

Output: 27,6V 5A or 13,8V 5A.

## STANDARD SPECIFICATIONS

- Water cooled, Diesel engine
- Radiator with mechanical fan
- Protective grille for rotating and hot parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Engine coolant heater
- Base frame design incorporates an integral fuel tank and anti-vibration isolators
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Industrial exhaust silencer and steel bellows supplied separately(for open sets)
- Static battery charger
- Manual for application and installation

## OPTIONAL EQUIPMENTS

### ENGINE

Fuel-Water Separator Filter

Oil heater

### ALTERNATOR

Anti-Condensation Heater

Oversized alternator

PMG excitation + AVR

Main line circuit breaker

### CONTROL SYSTEM

Automatic synchronizing and power control system ( multi gen-set Parallel )

Transition synchronization with mains

Remote annunciator panel

Remote relay output

Alarm output relays

Remote communication with modem

Earth fault, single set

Charge Ammeter

**TRANSFER SWITCH**

Three Pole Contactor

Four Pole Contactor

Three or four pole motor operated circuit breaker

**OTHER ACCESSORIES**

Main Fuel Tank

Automatic or manual fuel filling system

Manual oil drain pump

Low and high fuel level alarm

Residential silencer

Enclosure: weather protective or sound attenuated

Duct adapter ( on radiator)

Inlet and outlet motorized louvers

Inlet and outlet acoustic baffles

Trailer

Tool kit for maintenance

1500/3000 hours maintenance kit

Double wall chassis

### **GENSET CERTIFICATES**

- TS ISO 8528

- CE

- SZUTEST

- 2000/14/EC