



Model DPX-20504

Prime power	kva	100
	kw	80
Standby power	kva	110
	kw	88
Rated voltage line to line	V	400
Rated current	A	144,3
Maximun sound level	dB@7m	72

Engine-FPT

Model	NEF45TM2A.S500	
Aspiration	Four-stroke, water-cooled, 4 cylinders,in line, turbo charged and aftercooled air-air	
No. cylinders	4	
Valve per cylinder	2	
Displacement	L	4,5
unit Displacement	L	1,12
Bore*Stroke	mm	104x132
Compression ratio	17.5:1	
Rated speed	r/min	1500
Governor	Mechannical system	
Emission level	Euro II	
Fire order	1-3-2-4	
Start Motor	V	24

Exhaust System

Max exhaust back pressure	kPa	5
---------------------------	-----	---

Air intake System

Max inlet pressure (Dirty air)	kPa	5
Max inlet pressure (Clean air)	kPa	2

Fuel System

110% load(Standby power)	L/h	24,4
100% load(Prime power)	L/h	22
75% load(Prime power)	L/h	16,2
50% load(Prime power)	L/h	11
25% load(Prime power)	L/h	6,5
Fuel capacity for silent genset	L	185
Fuel capacity for open genset	L	200

Lubrication System

Oil max Temperature	°C	120
Oil capacity including filters	L	12,8
Oil capacity Max	L	8,5
Oil capacity Low	L	5,5

Cooling System

Coolant capacity in engine	L	8,5
Coolant capacity with radiator	L	10
Thermostat operating range.	°C	78~96
Coolant engine flow	L/min	103
Coolant Temp range	°C	83~99

Standard Features

Engine(FPT Engine)	●
Radiator 50°C max,fans are driven by belt	●
12/24V charge alternator	●
Alternator: single bearing alternator IP23	●
insulation class H/H	●
Standard auto control system	●
One set of air filter, fuel filter, oil filter	●
Main line circuit breaker / ACB	●
Base fuel tank	●
One 12V/Two 24V batteries, rac and cable	●
Exhaust system(Ripple flex exhaust pipe)	●
Exhaust siphon, flange, muffler	●
User manual	●
Battery charge	●
Water heater	●
	○

Options

Alternator heater	○
PMG	○
Water oil separator	○
Daily fuel tank	○
Remote control panel	○
Automatic transfer switch/ATS	○
Switch box	○
Standard: ●	Options:○

Alternator

Model		TAL-A44-D
Alternator Brand		LEROY SOMER
Phase		3
Voltage	V	400
Wiring Type		12 wires
Bearing		1
Power factor		0,8
Frequency	Hz	50
Prime power	KVA	100
Exciter Type		Brushless, self-excitation
Voltage regulation	%	±0.5
Protection Grade		IP 23
Insulation grade		H

Controller-Deepsea

Model

DSE 6120

7 configurable digital inputs

Built-in governor and AVR control

Base load (kW export) functionality

Mains (utility) de-coupling protection

Generator power (kW, kVA) monitoring


Overload (kW & kV Ar) protection

Emergency stop

Start failure



Unit Dimensions(Basic unit)

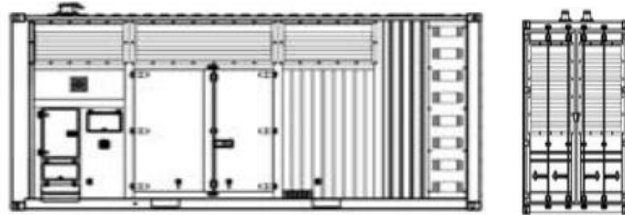

Silent Type

L*W*H

mm

2850x1050x1550

Weight

kg

1550

Warranty

FPT Engine

12 months from date of purchase or 1000 hours.

Generator

12 months from date of purchase or 1000 hours
(whichever comes first).